

# Nivotemp 61-1-TKÖ-..RD-M12-VA

- PSA Peugeot Specification -

## Technical Data

Operating pressure max. 1 bar  
 Operating temperature max. 80 °C  
 Spec. gravity of float min. 0.8 kg/dm<sup>3</sup>

### Material

Float SK 221 1.4571  
 Switch tube 1.4571  
 Flange PA  
 Stilling tube 1.4571

### Level contacts

**K10**  
 Function NO  
 Min. distance of contact 40 mm  
 Max. Voltage 24 V  
 Max. current 1.0 A  
 Contact load 10 VA

### Temperature contacts



Max. voltage 24 V  
 Max. current 2.5 A  
 Contact load 100 VA  
 Hysteresis 10 K ± 3 K  
 Switch point TKÖ-70 = 70 °C NC

### Connector

male plug M12 x 1 (4 pol. )  
 female plug not in scope of delivery  
 Protection class IP67 (with female plug fixed)

## Wiring diagram

All figures at empty reservoir

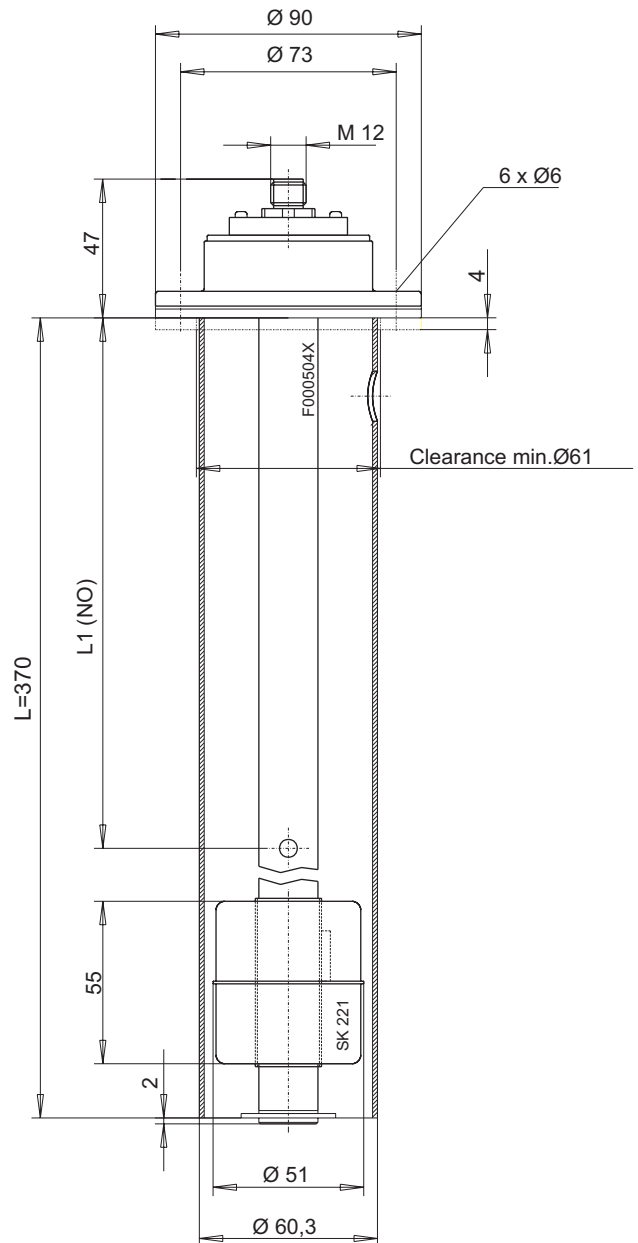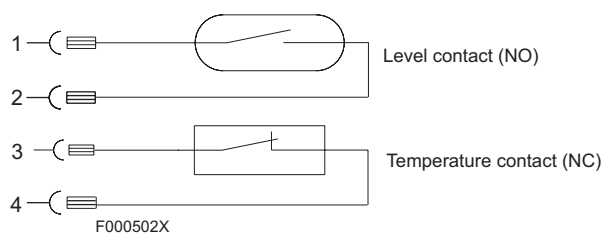

## Order Information

Type	Part No.	L	L1	Temperature
61-1-TKÖ-70RD-M12-VA1	10213099	370 mm	200 mm NO	70 °C NC
61-1-TKÖ-70RD-M12-VA2	10213199	370 mm	300 mm NO	70 °C NC

## Accessories

Part No. 9144050018 Connecting cable M12x1 with 1 x 5 pole M12 plug cable length: 3.0 m

we reserve the right to amend specifications

